


Channel Master

Instruction Sheet

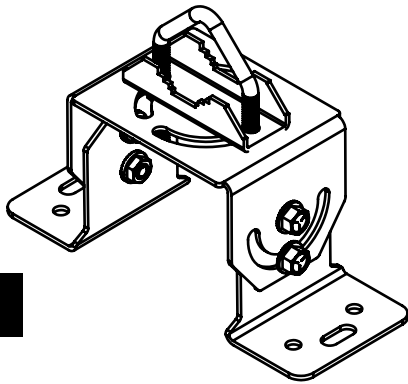

CM-3091


Package Contents and Accessories

- Universal Mount - Main Body Bracket, Side Plates, and Clamp
- Four (1/2") Flange Bolts
- Six (1/2") Flange Nuts
- Four (1/2") 2" Lag Screws
- One V-Bolt

Mount Assembly:


1. Attach the Main Body Bracket to the Side Plate Mounts using the four 1/2" Flange Bolts with four 1/2" Flange Nuts provided.

* Side Plates mount to the inner side of the Main Body Bracket.

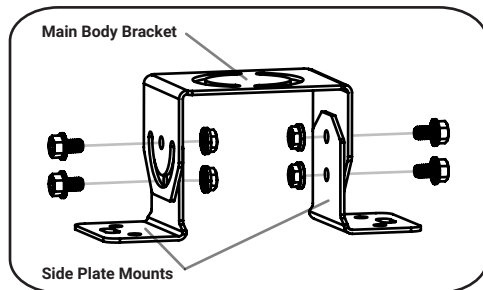


2. Attach the V-Bolt and Clamp to the Main Body Bracket using two 1/2" Flange Nuts provided. * V-Bolt can be mounted to the underside or outside the Main Body Bracket.

Option 1:



Option 2:




Mounting:


Attach the assembled mount to a flat surface using four 1/2" Lag Screws provided.

* Mount needs to be fully assembled before fastening lag screws.


Option 1:



Option 2:





Option 3:



Insert pole into V-Bolt/Clamp and tighten 1/2" Flange Nuts as shown below.

* The V-Bolt Assembly can secure a pole from 1.25" to 2" diameter. Channel Master recommends a maximum pole length of 5' per mount. (Pole Not Included)



MORE INFORMATION


Additional product information including videos and frequently asked questions is available at www.channelmaster.com/support

Warranty Information is available online at www.channelmaster.com/warranty

www.channelmaster.com

Channel Master

CM-3091

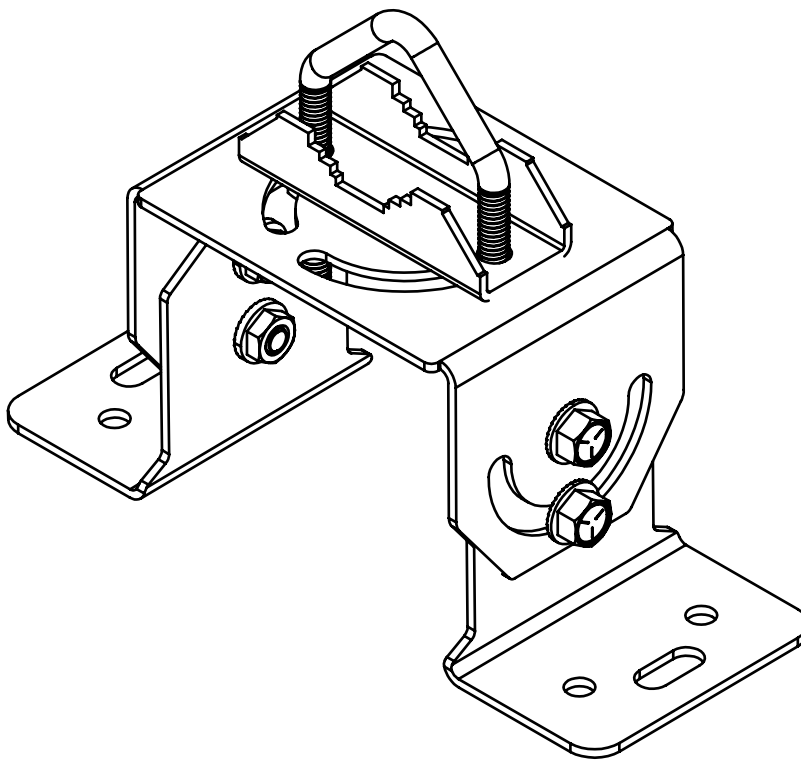

ChannelMaster.com

© 2022 Channel Master. Channel Master is a registered trademark. Specifications subject to change. All rights reserved. © 2022 Channel Master. Channel Master es una marca registrada. Especificaciones sujetas a cambio. Todos los derechos reservados. © Channel Master, 2022. Channel Master est une marque déposée. Les caractéristiques peuvent être modifiées sans préavis. Tous droits réservés. Pub CM3091.3/14/2022